

100G QSFP28 to QSFP28 Passive Direct Copper Cables

1. Applications

- 100 Gigabit Ethernet
- Fiber Channel over Ethernet
- Data storage and communication industry
- Switch/router/HBA
- Enterprise network
- SAN
- Data Center Network



2. Features

- QSFP28 conforms to the Small Form Factor SFF-8665
- 4-Channel Full-Duplex Passive Copper Cable Transceiver
- Support for multi-gigabit data rates :25.78Gb/s (per channel)
- Maximum aggregate data rate: 100Gb/s (4 x 25.78Gb/s)
- Copper link length up to 3m (passive limiting)
- High-Density QSFP 38-PIN Connector
- Power Supply :+3.3V
- Low power consumption: 0.02 W (typ.)
- I2C based two-wire serial interface for EEPROM signature which can be customized
- Temperature Range: 0~ 70 °C
- ROHS Compliant

3. Description

100G QSFP28 Passive Copper Cables are high performance, cost effective I/O solutions for 100G LAN, HPC and SAN applications. The QSFP28 passive copper cables are compliant with SFF-8436. It is offer a low power consumption, short reach interconnect applications. The cable each lane is capable of transmitting data at rates up to 25.78Gb/s, providing an aggregated rate of 100Gb/s.

4. standard

- IEEE 802.3bj
- InfiniBand EDR
- QSFP28 MSA
- ROHS Compliant

5. Performance Specifications

5.1. Absolute Maximum Ratings

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Table.1 Absolute maximum ratings

Parameter	Symbol	Min	Max	Unit
Maximum Supply Voltage	Vcc	0	3.6	V
Storage Temperature	Ts	-40	85	°C
Relative Humidity	RH	5	95	%

5.2. Recommended Operating Conditions

Table.2 Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Standard Tc	0	25	70	°C

Storage Temperature	Ts	0		70	°C
Relative Humidity	RH	5		95	%
Data Rate				25.78	Gbps
Power Dissipation	PD			0.02	W

5.3. Product Characteristics

Table.3 Product Characteristics


Parameter	Symbol	Min	Typical	Max	Unit	Note
Differential Impedance	Rin,p-p	90	100	110	Ω	
Insertion loss	SDD21	8		22.48	dB	At 12.8906 GHz
Differential Return Loss	SDD11	12.45		See1	dB	At 0.05 to 4.1 GHz
	SDD22	3.12		See2	dB	At 4.1 to 19 GHz
Common-mode to common-mode output return loss	SDD11 SDD22	2			dB	At 0.2 to 19 GHz
Differential to common-mode return loss	SDD11	12		See3	dB	At 0.01 to 12.89 GHz
	SDD22	10.58		See4		At 12.89 to 19 GHz
Differential to common-mode Conversion Loss	SCD21-IL	10		See5	dB	At 0.01 to 12.89 GHz
						At 12.89 to 15.7 GHz
		6.3				At 15.7 to 19 GHz
Channel Operating Margin	COM	3			dB	

Notes:

1. Reflection Coefficient given by equation $SDD11(dB) < 16.5 - 2 * \sqrt{f}$, with f in GHz
2. Reflection Coefficient given by equation $SDD11(dB) < 10.66 - 14 * \log_{10}(f/5.5)$, with f in GHz
3. Reflection Coefficient given by equation $SDD11(dB) < 22 - (20/25.78) * f$, with f in GHz
4. Reflection Coefficient given by equation $SDD11(dB) < 15 - (6/25.78) * f$, with f in GHz
5. Reflection Coefficient given by equation $SDD21(dB) < 27 - (29/22) * f$, with f in GHz




5.4. Pin Definitions

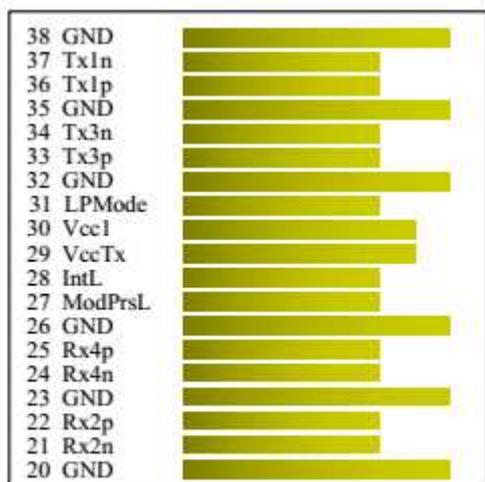

Top Side (Viewed From Top)

Module Card Edge

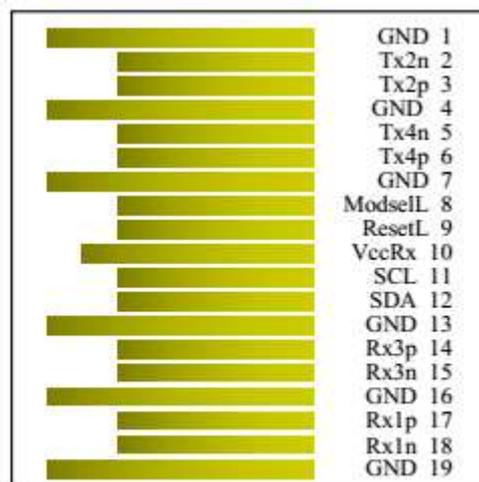

Bottom Side (Viewed From Bottom)

Table.4
QSFP Pin

Definitions

Pin number	Logic	Symbol	Signal	Description
1		GND	Signal Ground	Ground
2	CML-I	Tx2n	Tx2n	Transmitter Inverted Date Input.AC coupled
3	CML-I	Tx2p	Tx2p	Transmitter Non_Inverted Date Input.AC coupled
4		GND	Signal Ground	Ground
5	CML-I	Tx4n	Tx4n	Transmitter Inverted Date Input.AC coupled
6	CML-I	Tx4p	Tx4p	Transmitter Non_Inverted Date Input.AC coupled
7		GND	Signal Ground	Ground
8	LVTTTL-I	ModSelL	ModSelL	Module Select pin.Selected when held low by the host.
9	LVTTTL-I	ResetL	LPMODE_Reset	Module Reset.A"low" pulse induces a reset on the module.
10		Vcc Rx	Vcc Rx	+3.3V Power Supply Receiver
11	LVC MOS-I/O	SCL	SCL	2-wire serial interface
12	LVC MOS-I/O	SDA	SDA	
13		GND	Signal Ground	Ground
14	CML-O	Rx3p	Rx3p	Receiver Non_Inverted Date Input.AC coupled
15	CML-O	Rx3n	Rx3n	Receiver Inverted Date Input.AC coupled
16		GND	Signal Ground	Ground
17	CML-O	Rx1p	Rx1p	Receiver Non_Inverted Date Input.AC coupled
18	CML-O	Rx1n	Rx1n	Receiver Inverted Date Input.AC coupled
19		GND	Signal Ground	Ground
20		GND	Signal Ground	Ground
21	CML-O	Rx2n	Rx2n	Receiver Inverted Date Input.AC coupled
22	CML-O	Rx2p	Rx2p	Receiver Non_Inverted Date Input.AC coupled
23		GND	Signal Ground	Ground
24	CML-O	Rx4n	Rx4n	Receiver Inverted Date Input.AC coupled
25	CML-O	Rx4p	Rx4p	Receiver Non_Inverted Date Input.AC coupled
26		GND	Signal Ground	Ground
27	LVTTTL-O	ModPrsL	ModPrsL	Module Present pin.Internally grounded inside the module.
28	LVTTTL-O	IntL	IntL	Interrupt by the QSFP module."Low"indicates an Alarm/Warning.
29		Vcc Tx	Vcc Tx	+3.3V Power Supply Transmitter
30		Vcc1	Vcc1	+3.3V Power Supply

1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (July 26, 2001)

6.3. Important Notice

Important Notice:



DO NOT
Kink
the
Cable



DO NOT
Over-Bend
the Cable
Behind the
Connector



DO NOT
Twist
the
Connector



ANTISTATIC



FRAGILE

Note:

- 1) Copper type maximum length recommended at 15 meters;
- 2) Various cable lengths available for all types;
- 3) Latch/tab available "on top" or "bottom" position.