


U6 is a 300 Mbps wireless Adapter. Equipped with an external 6 dBi high-gain omnidirectional antenna, U6 delivers twice the signal reception performance of its counterparts. It can easily penetrate three walls even under interference, making it an ideal choice for families living in large or multi-storey houses. U6 supports the soft AP mode. In this mode, U6 functions an AP to turn the wired network into a wireless one, making the networking of wireless LAN quick and easy. It is compatible with many operating systems, allowing connection of computers, notebooks and other wireless devices.



The real 6 dBi ultra-long OFC high-gain antenna sets a record high in signal transmission and reception distances, allowing you to pick up wireless signals anywhere at home.

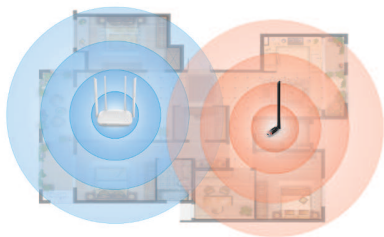


Powered by the 300 Mbps wireless chip solution, its downloading speed is twice the speed of a 150 Mbps wireless USB adapter with a 100 Mbps internet connection. The 2 x 2 MIMO architecture offers better wireless connection performance and stability for outstanding gaming and video experience.



The Soft AP mode enables U6 to mount onto a PC that has wired internet connectivity to function as a Wi-Fi hotspot, so that wireless clients such as mobile phones, tablets, and computers can access the internet through U6.

Note: The Soft AP mode works properly with Windows XP/7/8/8.1 as well as third-party hotspot software.

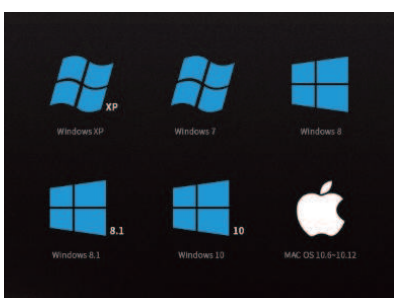

Compatible with Windows XP/7/8/8.1/10, MAC OSs 10.6 - 10.12, and Linux OSs, to address the requirements of various desktop and laptop users for wireless internet connections.

HARDWARE FEATURES	
Interface	USB2.0
Dimensions (W X D X H)	48mm*20mm*8mm(L x W x H)
Antenna Type	1* 6dBi external antenna
WIRELESS FEATURES	
Wireless Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Frequency	2.400~2.4835GHz
Signal Rate	11b: Up to 11Mbps(dynamic) 11g: Up to 54Mbps(dynamic) 11n: Up to 300Mbps(dynamic)
Transmit Power	<20dBm (EIRP)
Wireless Modes	Station Mode, SoftAP Mode
Wireless Security	64/128-bit WEP,WPA-PSK / WPA2-PSK,WPA / WPA2
OTHERS	
Certification	CE, RoHS
Package Contents	1*Wireless Adapter U6,1*Resource CD,1* Install Guide
System Requirements	windows10,Windows 8.1, Windows 8,Windows 7, ,Windows XP, Mac OS 10.7~10.12, Linux
Environment	Operating Temperature: 0°C~40°C (32°F~104°F)
	Storage Temperature: -40°C~70°C (-40°F~158°F)
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing
Related Products	F3、FH456、A9

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

6-8 Floor, Tower E3, No.1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

Phone: (86 755)2765 7180 Fax: (86 755)2765 7178

Email: sales@tenda.com.cn support@tenda.com.cn

Website: <http://www.tenda.com.cn>

©2016 SHENZHEN TENDA TECHNOLOGY CO.,Ltd, the Tenda logo is registered trademark of Shenzhen Tenda Technology Co.,Ltd in China and/or other countries. Other
Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. ALL rights reserved.