



Product Description


The Tenda nova MW5c is a whole home mesh WiFi system designed for medium-to-larger sized households that have high speed broadband services coming into your home. Powered by Tenda's proprietary mesh technology, creating a distributed network throughout your home. A 3-pack of the MW5c covers up to 3500 square feet and works well behind multiple walls. All nodes feature gigabit ports, getting the most out of your high speed broadband service and ensures smooth streaming of 4K videos. The other nodes automatically connect using pre-paired configurations making setup a breeze. All of these make the Tenda nova MW5c an ideal choice for whole home WiFi coverage.

More features

- * Easy setup: The other nodes automatically connect to the primary node making cabling unnecessary.
- * Parental Controls: Manage your child's online time.
- * Security: Supports access control and guest network.



Power by Tenda's advanced mesh technology, MW5c creates a distributed network through the interconnection of multiple nodes. Easily achieve WiFi coverage for all types of large houses.

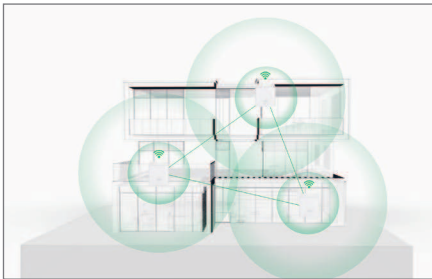


Any node of MW5c can be used as the main node. And other nodes will automatically connect to the master node after powering on. A 3-pack of Nova MW5c covers up to 3500 square feet. Expand your WiFi coverage simply by adding nodes.




Any Nova-series product (MW3, MW5, MW5S, MW6, MW12) can be used as an extra unit in an existing Nova network easily to meet various house type requirements.



Two amplifiers used both on 2.4GHz and 5GHz bands of the every nodes to enhance the signal strength and receiving capability, helping the nova MW5c outperform ordinary routers.

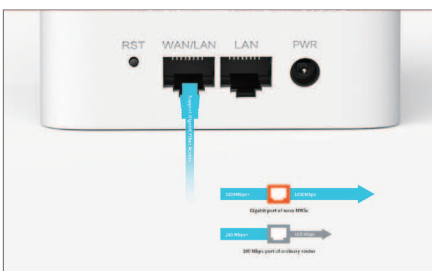


With full gigabit ports, the MW5c makes most of your high speed broadband coming into your home.

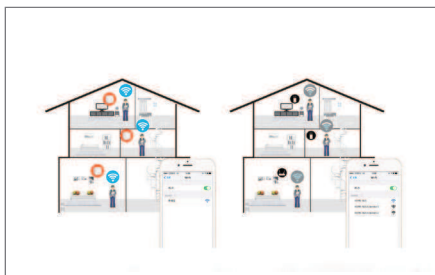

With the seamless roaming feature, you can go from room to room without losing connection, creating a lag-free video call, online gaming experience when you are on the move.



Combining the 1 GHz main chip with MU-MIMO technology, the Nova MW5c communicates simultaneously with multiple devices, ensuring a lag-free internet connection when you enable the Capacity-oriented Mode on Tenda App.

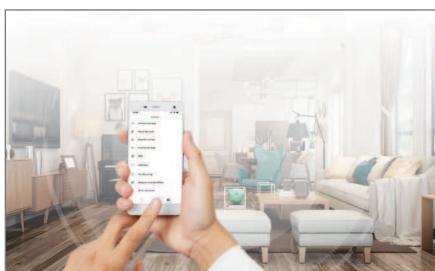

Tenda WiFi App provides the easiest way to manage your MW5c. The real-time status of online devices is all in your hands.

WiFi Speed	AC1200	AC1200	AC1200	AC1200	AC2100
Compatible Broadband	100 Mbps	>100 Mbps	> 100 Mbps	≥200 Mbps	≥500 Mbps
Coverage Area*	up to 3500 sq.ft	up to 3500 sq.ft	up to 3500 sq.ft	up to 6000 sq.ft	up to 6000 sq.ft
Max. Mesh nodes supported (Qty./Size)	5 (5000 sq.ft)	6 (6000 sq.ft)	6 (6000 sq.ft)	9 (12000 sq.ft)	12 (15000 sq.ft)
Max. No. of Connected Devices	40 devices	60 devices	80 devices	90 devices	120 devices

Hardware Specifications

Standards	IEEE 802.3, IEEE 802.3u
Ports	Mesh5: 2 x 10/100/1000Mbps Ethernet ports -1 WAN/LAN port -1 LAN port
Antennas	Mesh5: 2 x 3 dBi built-in omni-directional antennas
Button	Mesh5: 1 x Reset button
Power	Mesh5 Input: 100 - 240 V, 50/60 Hz, 0.6 A Output: DC 12 V == 1 A
Indicator	Mesh5: 1 System/Signal
Dimensions	Mesh5: 91 mm x 91 mm x 93 mm (3.58 in. x 3.58 in. x 3.66 in.)

Wireless Features

Wireless Standards	5GHz: IEEE 802.11ac/a/n 2.4GHz: IEEE 802.11b/g/n
Data Rate	5 GHz 867 Mbps 2.4 GHz 300 Mbps
Frequency	Simultaneous dual band 2.4 GHz & 5 GHz
Basic Features	SSID Broadcast Beamforming MU-MIMO
Wireless Security	WPA/WPA2-PSK
Wireless Roaming	Compliant with IEEE 802.11k/v/r

Software Features

Internet Connection Type	PPPoE, Dynamic IP, Static IP, Bridge Mode
DHCP Server	DHCP Server DHCP Client List
Virtual Server	Port Forwarding UPnP
Firewall	UDP flood attack defense TCP flood attack defense ICMP flood attack defense
DNS	Manually setting up DNS server
VPN	IPsec pass through PPTP pass through L2TP pass through

Others	Parental Control
	Guest Network Firmware upgrade online
	Resetting to factory settings
Setup Requirements	A mobile device running Android 4.0+ or iOS 8+
Others	
Temperature	Operating Temperature: 0 °C - 40 °C
	Storage Temperature: -40 °C - 70 °C
Humidity	Operating Humidity: (10% - 90%) RH non-condensing
	Storage Humidity: (5% - 90%) RH non-condensing
Certificates	FCC, CE, RoHS, EAC, IC
Package Contents (3-pack)	Mesh5 x 3 12 V/1 A power adapter x3 Quick installation guide x 1 Gigabit Ethernet cable x 1

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int'l E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178

PC:518055

